




с мембрана

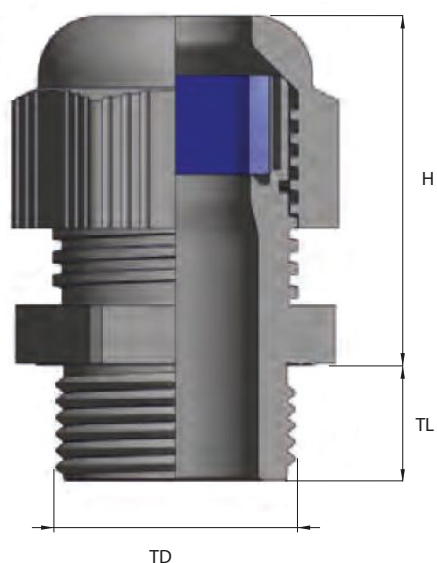

без мембрана

Код с мембрана	Код без мембрана	Тип	TD	TL	H	Обхват на стягането
750-07-6-1	750-07-6-0	PG-07	12.5	8	33	3.0 - 6.5
750-09-6-1	750-09-6-0	PG-09	15.2	8	37	4.0 - 8.0
750-11-6-1	750-11-6-0	PG-11	18.6	10	41	5.0 - 10.0
750-13-6-1	750-13-6-0	PG-13.5	20.4	9	44	6.0 - 12.0
750-16-6-1	750-16-6-0	PG-16	22.5	9	45	10.0 - 14.0
750-19-6-1	750-19-6-0	PG-19	25	11	50	12.0 - 16.0
750-21-6-1	750-21-6-0	PG-21	28.3	11	53	13.0 - 18.0
750-29-6-1	750-29-6-0	PG-29	37	11	62	18.0 - 25.0
750-36-6-1	750-36-6-0	PG-36	47	13	72	22.0 - 32.0
750-42-6-1	750-42-6-0	PG-42	54	15	72	30.0 - 38.0
750-48-6-1	750-48-6-0	PG-48	59.3	15	73	34.0 - 44.0
750-63-6-1	750-63-6-0	PG-63	68	17	78	42.0 - 60.0

Технически характеристики	
Материал	Полиамид 6
Стандарт	EN60423
Степен на защита	IP 65
Работна температура	-30 °C ~ +80 °C
Уплътнение	Хлоропрен
Цвят	RAL 7035